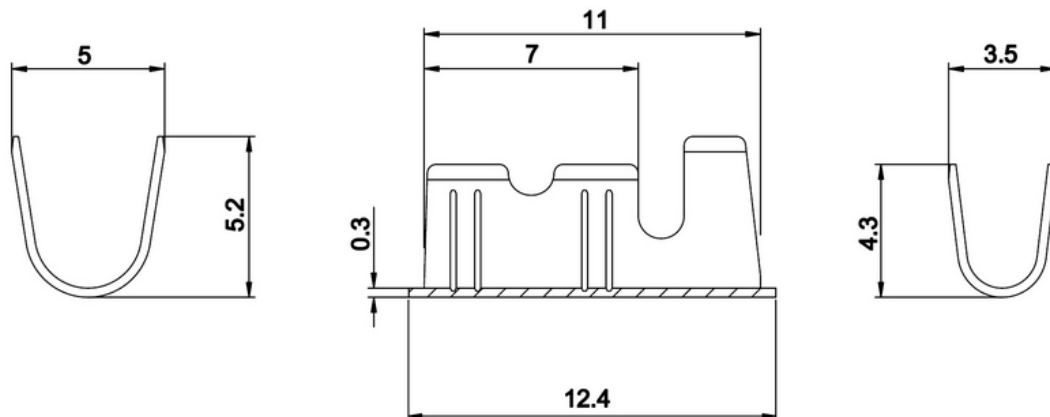


**ADERENDHÜLSE mit Trennsteg**

| Conductor cross-section mm <sup>2</sup> | A.W.G. (B&S) | Insertion measurement | Artikel-No. | Material/surface | Amount/EH |
|-----------------------------------------|--------------|-----------------------|-------------|------------------|-----------|
| 1,5 - 2,5                               | 16 - 14      |                       | 21 008 110  | CuZn             | 15.000    |
| 1,5 - 2,5                               | 16 - 14      |                       | 21 008 120  | CuZn / Sn        | 15.000    |