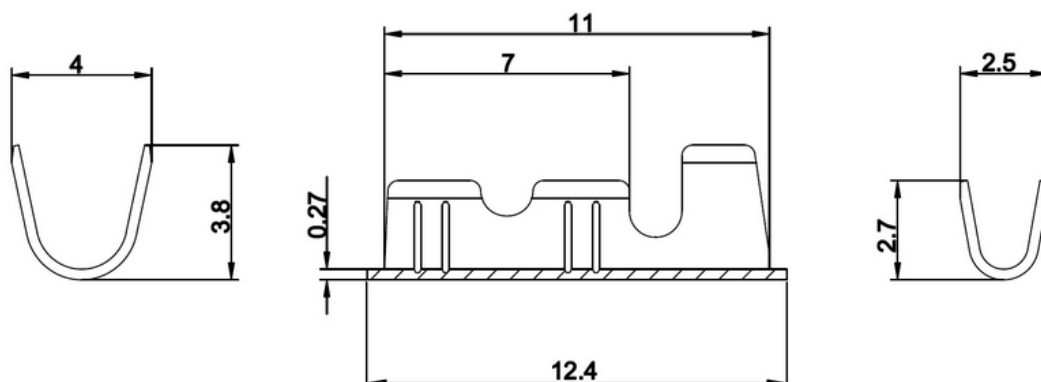


**ADERENDHÜLSE mit Trennsteg**

Conductor cross-section mm ²	A.W.G. (B&S)	Insertion measurement	Artikel-No.	Material/ surface	Amount/EH
0,5 - 1	20 - 18		21 006 110	CuZn	20.000
0,5 - 1	20 - 18		21 006 120	CuZn / Sn	20.000
0,5 - 1	20 - 18		21 006 210	Stahl	20.000
0,5 - 1	20 - 18		21 006 240	Stahl / Ni	20.000