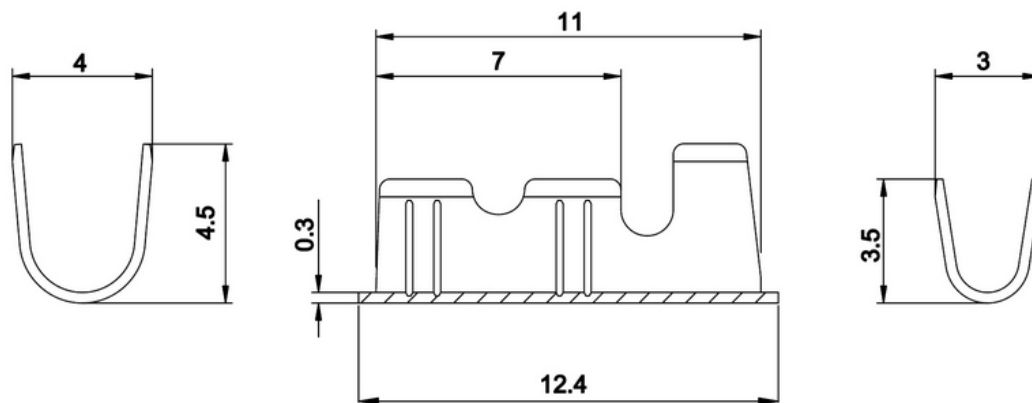


**ADERENDHÜLSE mit Trennsteg**

Conductor cross-section mm ²	A.W.G. (B&S)	Insertion measurement	Artikel-No.	Material/surface	Amount/EH
1 - 1,5	18 - 16		21 007 110	CuZn	20.000
1 - 1,5	18 - 16		21 007 120	CuZn / Sn	20.000
1 - 1,5	18 - 16		21 007 310	CuSn	20.000
1 - 1,5	18 - 16		21 007 320	CuSn / Sn	20.000