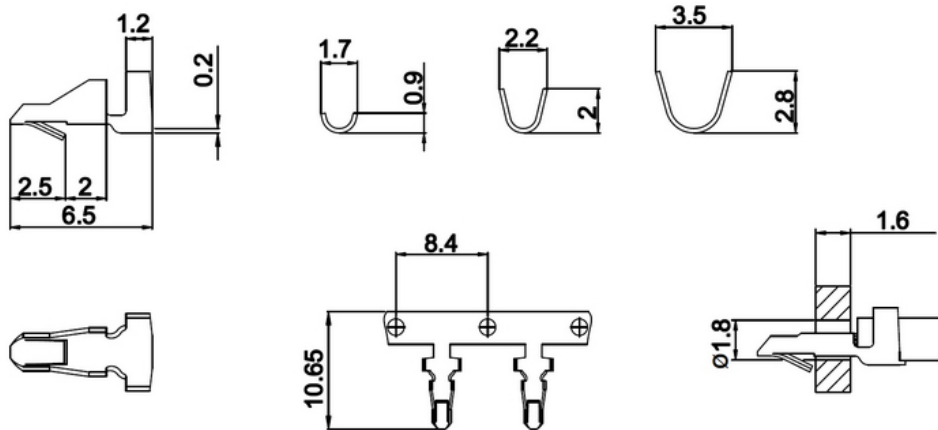



LÖTHILFE Einbau- Ø1,8 für Platinenstärke max. 1,6 mm

Conductor cross-section mm ²	A.W.G. (B&S)	Insertion measurement	Artikel-No.	Material/surface	Amount/EH
0,25 - 0,8	22 - 18	Einbau-Ø 1,8	21 109 121	CuZn / Sn	15.000
0,25-0,8	22-18	Ø1,8	21 109 121	CuZn / Sn	15.000
0,25-0,8	22-18	Ø1,8	21 109 321	CuSn / Sn	15.000

LÖTHILFE Einbau- Ø1,8 für Platinenstärke max. 1,2 mm

Conductor cross-section mm ²	A.W.G. (B&S)	Insertion measurement	Artikel-No.	Material/surface	Amount/EH
0,25 - 0,8	22 - 18	Einbau- Ø1,8	21 119 121	CuZn / Sn	15.000
0,25-0,8	22-18	Ø1,8	21 119 121	CuZn / Sn	15.000
0,25-0,8	22-18	Ø1,8	21 119 321	CuSn / Sn	15.000