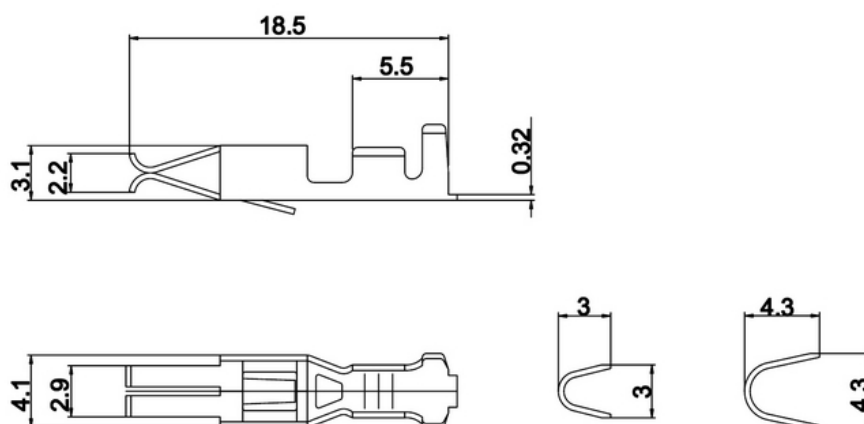


**DOPPELFLACHKONTAKT mit Schlitz**

Conductor cross-section mm ²	A.W.G. (B&S)	Insertion measurement	Artikel-No.	Material/surface	Amount/EH
0,75 - 1,5	19 - 16	0,8	20 288 114	CuZn	4.000
0,75 - 1,5	19 - 16	0,8	20 288 124	CuZn / Sn	4.000

DOPPELFLACHKONTAKT ohne Schlitz

Conductor cross-section mm ²	A.W.G. (B&S)	Insertion measurement	Artikel-No.	Material/surface	Amount/EH
0,75 - 1,5	18 - 16	0,8	90 288 114	CuZn	4.000
0,75 - 1,5	18 - 16	0,8	90 288 124	CuZn / Sn	4.000
0,75 - 1,5	18 - 16	0,8	90 288 324	CuSn / Sn	4.000